



Actinic BL TL(-K)/TL-D(-K)

Actinic BL TL 6W/10 1FM

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

Actinic BL TL(-K)/TL-D(-K)

Product data

• General Characteristics

Cap-Base	G5
Bulb	T16
Main Application	Reprography
Useful Life	5000 hr
Life to 50% failures	10000 hr
EM	

• Light Technical Characteristics

Color Code	10
Color Designation (text)	Actinic
Chromaticity Coordinate X	222 -
Chromaticity Coordinate Y	210 -
Depreciation 500 hours	17 %
Depreciation 1000 hours	25 %
Depreciation 2000 hours	35 %

• Electrical Characteristics

Lamp Wattage	6 W
Lamp Wattage Technical	6 W
Lamp Voltage	42 V
Lamp Current	0.16 A

• Environmental Characteristics

Mercury (Hg) Content	4.4 mg
----------------------	--------

• UV-related Characteristics

UV-A Radiation 100hr (IEC)	1.4 W
UV-B/UV-A (IEC)	0.2 %


• Product Dimensions

Base Face to Base Face A	212.1 (max) mm
Insertion Length B	216.8 (min), 219.2 (max) mm
Overall Length C	226.3 (max) mm
Diameter D	16 (max) mm

• Product Data

Order code	928000501030
Full product code	928000501030
Full product name	Actinic BL TL 6W/10 1FM
Order product name	Actinic BL TL 6W/10 1FM/10X25CC
Pieces per pack	1
Packing configuration	10X25CC
Packs per outerbox	250
Bar code on pack - EAN1	8711500260390
Bar code on intermediate packing - EAN2	8711500260406
Bar code on outerbox - EAN3	8711500260413
Logistic code(s) - 12NC	928000501030
Net weight per piece	21.000 gr


Dimensional drawing

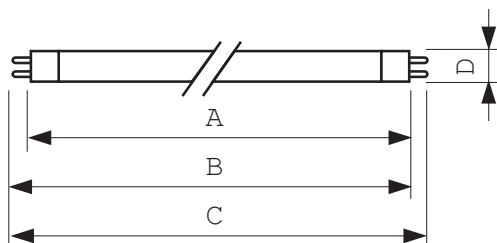

Actinic BL TL 6W/10 1FM


Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL 6W/10	212.1	216.8	219.2	226.3	16

Dimensional drawing



G5

Photometric data

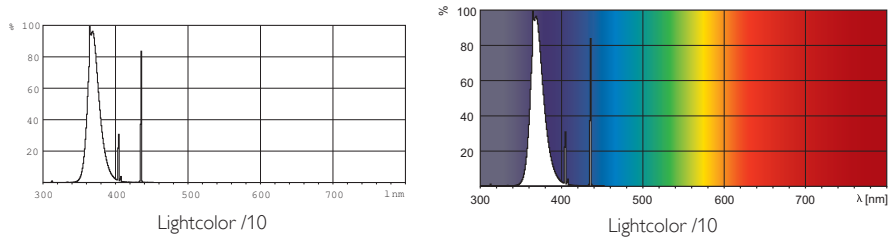

© 2013 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2013, May 9
data subject to change