

ENERGIZER 2L76




Industry Standard Dimensions

mm (inches)




This Battery has Underwriters Laboratories component Recognition

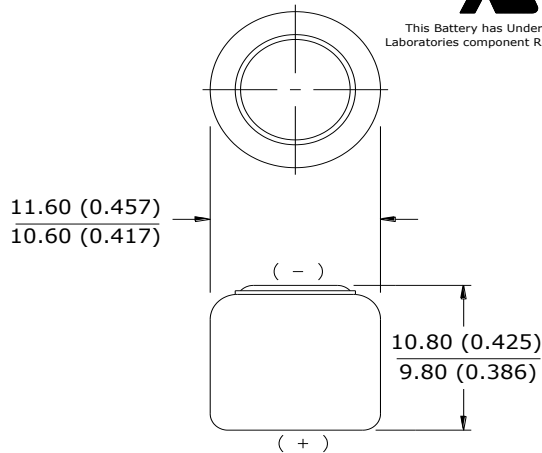

Specifications

| | |
|----------------------------|---|
| Classification: | "Lithium Photo" |
| Chemical System: | Lithium / Manganese Dioxide (Li/MnO ₂) |
| Designation: | IEC-CR11108 |
| Nominal Voltage: | 3.0 Volts |
| Storage Temp: | -40°C to 60°C (-40°F to 140°F) |
| Operating Temp: | -40°C to 60°C (-40°F to 140°F) |
| Typical Capacity: | 160 mAh (to 2.0 volts) (Rated at 15k ohms at 21°C) |
| Typical Weight: | 3.0 grams (0.1 oz.) |
| Typical Volume: | 1.1 cubic centimeters (0.074 cubic inch) |
| Max Discharge: | 60 mA continuous (80 mA pulse) |
| Max Rev Charge: | 1 microampere |
| Typical Li Content: | 0.056 grams (0.002 oz.) |
| UL Listed: | MH12454 |

Typical Discharge Characteristics

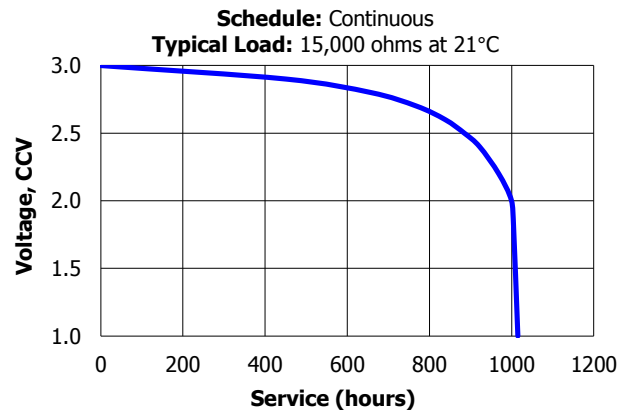

Simulated Application Tests

Typical Performance at 21°C (70°F)

| Schedule (time) | Drain (mA) | Load (ohms) | Cutoff Voltage | | |
|-----------------|------------|-------------|----------------|--------------|--------------|
| | | | 2.6V (hours) | 2.4V (hours) | 2.0V (hours) |
| Continuous | 0.16 | 15000 | 840 | 920 | 1000 |

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.