



LED reflektor

JUPITER LED 240V 50W 4000K IP65

Order Number
253200055

EAN13
8595209936929



General information

Product description:	JUPITER LED 240V 50W 3000K IP65
Model/Description:	LED reflektor
Finish:	Průmyslový
Brand/Manufacturer:	NBB
Nominal voltage (V):	230-240
Nominal service life (h):	25000
Material:	Aluminium

Physical characteristics

Colour:	Black/černá
Number of couplings:	1
Continuous montage:	Ne/No
Number of chips:	1 multichip
Type of chip:	Epistar
Dimensions (mm):	285 x 240 x 140 mm
Packing method:	1/1
Weight net (kg):	2,35 Kg
Weight gross (kg):	2,52 Kg
Spacing of fixing holes:	185 mm

Electrical characteristics

Nominal wattage (W):	50
Rated power (W):	50
Nominal current (A):	0,22

Operating voltage (h): 110-240

Type of Voltage: AC

Lowest permitted operating voltage (V): 110V

Working conditions

Lamp type:	LED
Type of control gear:	Elektronický
Dimmable by conventional dimmers:	Ne/No
Light source is part of the fixture:	Yes/ano
Operating ambiente temperature - Ta max °C:	-20/+40°C
Working temperature of the ballast body -Tc max:	60°C
Maximum permitted storage temperature:	80°C
Type of cooler:	Aluminium
Degree of protection (IP):	IP65
Burning position:	Universal
Application:	Všeobecné osvětlování
Integrated driver:	Yes/Ano

EuP Parameters

Rated service life (hours):	25000
Average Lifetime B50 (h):	12500
Energy consumption (AGGR) kWh / 1.000 h:	52
Turn-on time:	<0,3s
GLS replacement:	>200 W
Number of maximal switching cycles:	>10.000
Colour difference:	0,9
The light source is designed for outdoor and industrial use:	Yes/ano

Lighting characteristics

Lum. flux after 100 hrs. oper.:	4500 lm +/- 10%
Nom. lum. flux:	4500 lm +/- 10%
Radiation angle:	>120°
CCT:	3000
Correlated colour temperature CCT (EM):	3065
Color rendering:	1B
Colour Code:	830
Light Colour:	Warmwhite
Wavelength range (nm):	360...760 nm
Dominant wavelength:	613 nm
Chromaticity coordinates x:	0,3832
Chromaticity coordinates y:	0,3823
Colour rendering index CRI:	>70

Environmental characteristics

Maximum mercury content (mg):	0,00 mg
-------------------------------	---------

Energetic characteristics

Lamp power factor (λ):	>0,9
----------------------------------	------

Rated efficiency after 100h.:	99%
-------------------------------	-----

Lamp efficacy (lm/W):	90 lm /W
-----------------------	----------

EuP regulations

Indication of regulation:	ES/1194/2012
---------------------------	--------------

The rate of premature failures:	<1%
---------------------------------	-----

Mounting methods/application

Suitable for domestic use.:	No/Ne
-----------------------------	-------


Installation height (m):	4-5m
--------------------------	------

Safety information

Protection class:	Třída I
-------------------	---------

Safety instructions:	www.nbb.cz
----------------------	------------

Spectral curve

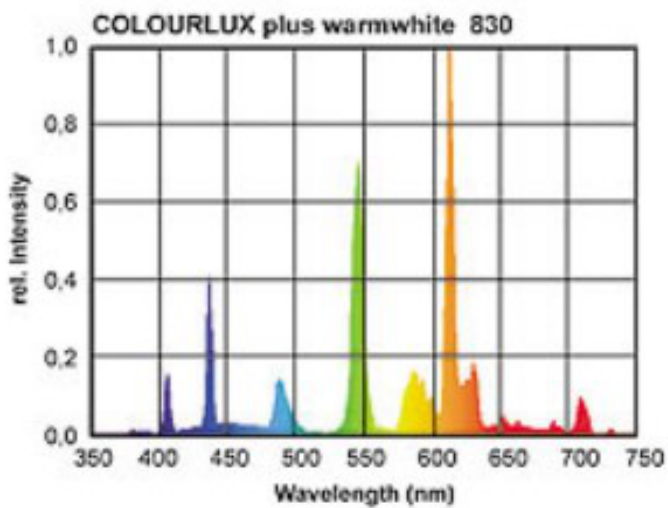

Schématický náčrt

