

BULKHEAD T&O IP65 - Round



* Typically used for diffused lighting for both indoor and outdoor or wet environments (IP65).

* Substitutes ceiling fixtures with fluorescent lamps to give immediate lighting without flickering and increased duration.

* Essential design anywhere.

* Shockproof plastic 1004 body and screen.

* Operating temperature: -20°C +35°C.

* Typical uses: to light stairwells, terraces, corridors, communal areas, gardens, bathrooms and anterooms.

Item Characteristics

Code	BH20
Lamp Voltage	220-240 V
Nominal Power	20 W
Base	cavi/wires
Lamp Current	0,09 A
Nominal Flux	2000 LUMEN
Light Tonality	Natural white
Colour temperature	4000 K
Opening beam	120°
Diameter	220 mm
Lenght	73 mm
Weight	420 g


Performance

Axis cd	560
Photometry	F145
Irc/Ra	>80
Lifetime	25000 h
Energy Class	A+
kWh/1000h	20

Tech Info

Dimmable	NO
Number of ON-OFF cycles	100000
Power Factor	0,9
Warm-up time up to 60 % of the full light output	Instant Full Light
Lamp start time	<0,2s
Mercury (mg)	0
LLMMF - Lamp lumen maintenance factor	70
T (°C) Working environment Temp.	-25°C / +35°C
Fulfilled Directives and norms	2006/95/CE * Bassa Tensione 2004/108/CE * Compatibilità Elettromagnetica 2011/65/UE * RoHS 2012/19/UE * RAEE EN 61547 * anno 2010 EN 55015 * anno 2014 EN 61000-3-2 * anno 2007 EN 61000-3-2/A1/A2 * anno 2011 EN 61000-3-3 * anno 2014 EN 60598-1 EN 60598-2-2 2010/30/EU * Energy Consumption 874/2012 * Regulation for Energy Labelling

Spectroradiometry and Photometry

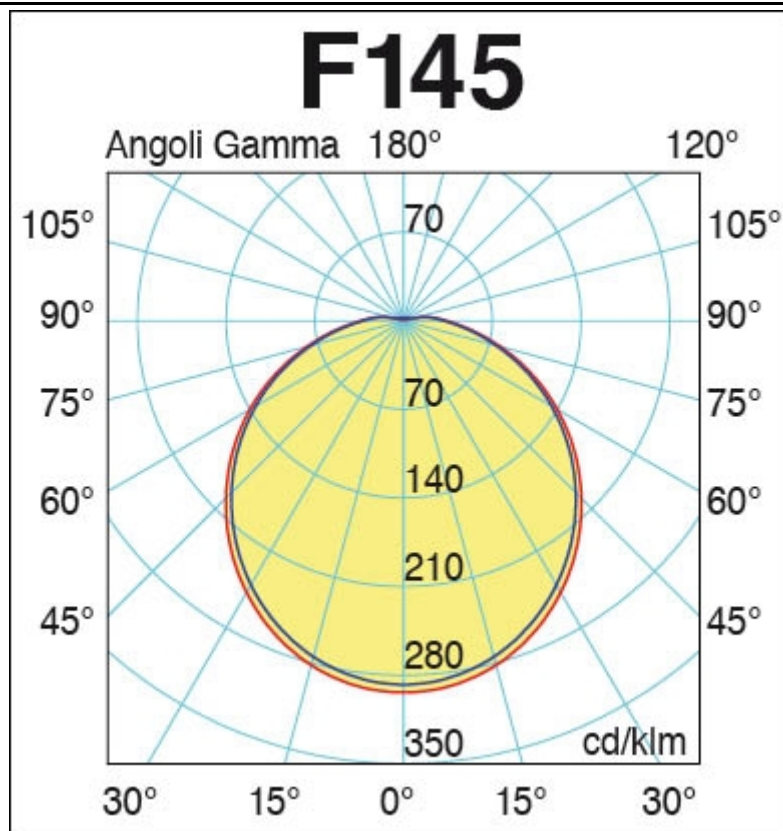

Eulumdat file for lighting calculations available on the website

Shipping info

Single pack dimensions L x H x D (mm)	225 x 225 x 73
Item barcode	8011905843632
Pack	10 pz
Master barcode	8011905788919

All parts of this document are Duralamp ownership. All rights reserved. This document and the included information are provided without any responsibility deriving from mistakes or omissions. No part of this document can be cut, reproduced or used without written authorization. Duralamp maintains the right to change the included data without notice due to improvements of the products.